


Styrofoam compactor

EPS compactor

Features and benefits

- ||| Optimum pre-compaction by feeder systems PZZ or MZ 2
- ||| Special pre-compaction channel allows compaction ratios as high as 1:25 or 1:30
- ||| Effective pre-compaction neutralizes re-expansion and makes for container content weights up of at least 3.5 tons (SPB 30)

||| Container Pressen | Schneckenverdichter | Ballenpressen | Umlade- und Verschiebeanlagen | Hub-Kippvorrichtungen
Compactors | Auger Compactors | Balers | Transfer and Shifting Stations | Bin Lifters

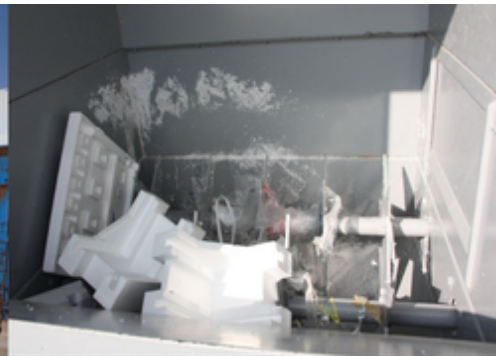


Guaranteed powerful performance

The robust steel construction and quality workmanship ensure a long service life and reliability.

The feeder system pulls the material into the machine and tears it to prepare it well for further processing in a compactor.

High-quality components ensure reliable function, low maintenance and quiet operation < 65 dB (A).

Of course our paints are lead and chromium free, and you can select the colour of your choice.

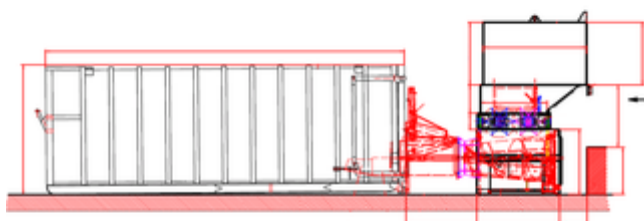

		SPN 11	SPN 15	Container		SPB 25	SPB 28	SPB 30
Length (L)	mm	1510	1510	Volume	m ³	25	28	30
Width (B)	mm	2830	2830	Length (L)	mm	5450	6000	6540
Width (B) without coupling system	mm	1620	1620	Width (B)	mm	2420	2420	2420
Height (H)	mm	1250	1250	Height (H)	mm	2500	2500	2500
Dimension A	mm	1250	1250	Dist. container end to locking trunnion (V)	mm	3275	3555	3775
Feeding opening (lxb)	mm	1225 x 1380	1225 x 1380	Machine weight	kg	3000	3100	3200
Auger speed	n/min	15	15	Skip containers upon enquiry				
Auger diameter	mm	800 / 500	800 / 500					
Rated torque	Nm	7015	7200					
Machine weight	kg	2200	2200					
Motor power rating	kW	11	15					
Electrical power supply		3 L / N / PE; 400 V, 50 Hz, 50 A						

Subject to technical amendments