

Static Compactor

long version type SHD

Simply powerful

PRESTO static compactors can be used wherever large volumes of recyclable and waste materials and residual waste are disposed of.

The horizontally mounted compactor plate compacts the material into the connected container. The compacting unit remains firmly in place and the container is removed for emptying.

The PRESTO compactor as your functional, cost-reducing link in the recycling cycle. We design the optimum solution for your disposal needs.

Individually usable

for materials and recyclables like paper and cardboard, printing and punching waste, packaging and commercial waste, residual waste and foil.

for industries such as industrial and waste disposal companies, logistics centers, paper processing, as well printing and packaging industry, wholesalers and many more.




Versatile & efficient

- Large filling opening and increased output for high throughput rates
- Adapted cycle times and optimum pressing force for a high compaction degree
- Low maintenance due to optimum arrangement of the polyamide and press body guides
- Wide range of accessories and loading types for extensive application options
- Self-sufficient compaction unit or as integration into work and production processes

Economical & elegant

- RAL color selection from a variety of lead and chromium free paints
- Low-noise operation of < 75 dB (A)
- Many years of experience in construction, design and project planning
- PRES-TO-GO control > reduced power consumption, CO₂ reduction through optimal route planning
- Overview, access and management via PRES-TO-web / PRES-TO-GO app

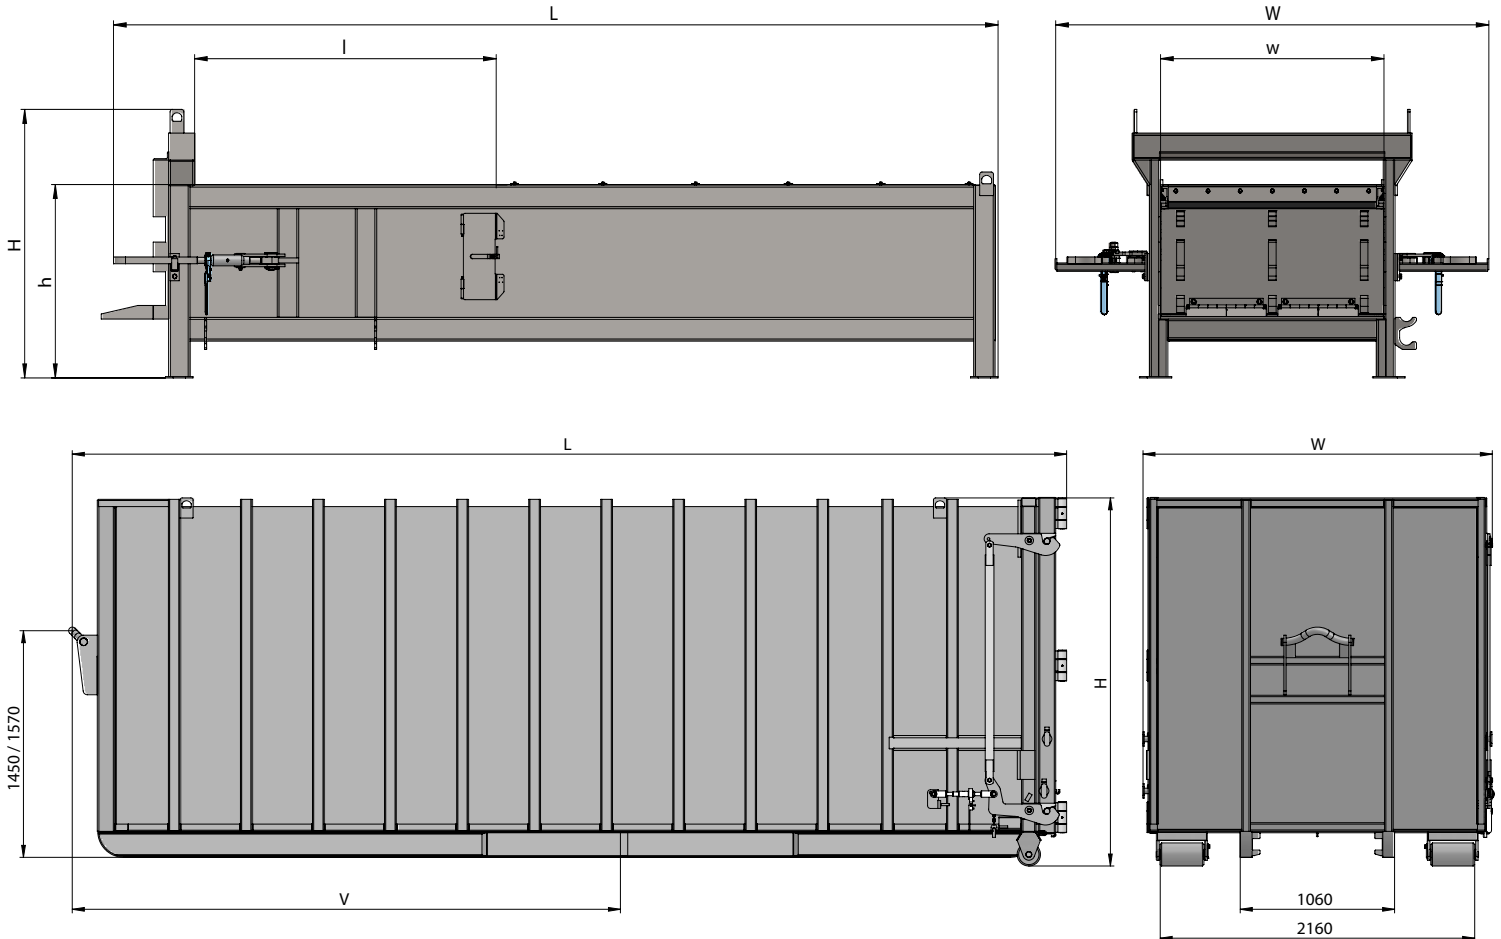

Machine		SHD 1600	SHD 1800	SHD 2200	SHD 2500	SHD 3000
Length (L)	mm	4200	4600	5400	6000	7180
Width (W)	mm	2740	2740	2740	2740	2740
Height (H)	mm	2050	2050	2050	2050	2050
Filling height without hopper (h)	mm	1140	1140	1140	1140	1140
Filling opening (l x w)	mm	1360 x 1460	1560 x 1460	1960 x 1460	2260 x 1460	2760 x 1460
Stroke volume	m ³	1,4	1,6	2	2,3	2,8
Pressing force	kN	300	300	400	400	400
Specific pressing force	kN/m ²	316	316	421	421	421
Cycle time	s	38	42	34	38	45
Machine weight	kg	3500	4250	5000	6400	8800
Motor power rating	kW	7,5	7,5	15	15	15
Electrical power supply		3 L / N / PE; 400 V, 50 Hz				

Container		MB-U 25	MB-U 28	MB-U 30	MB-U 25V	MB-U 28V	MB-U 30V	MB-K 28
Volume	m ³	25	28	30	25	28	30	28
Length (L)	mm	5770	6320	6860	5770	6320	6860	6670
Width (W)	mm	2420	2420	2420	2420	2420	2420	2420
Height (H)	mm	2550	2550	2550	2550	2550	2550	2550
Locking dimension (V)	mm	3265	3515	3765	3265	3515	3765	3765
Container weight	kg	2820	3050	3250	3110	3330	3540	3220

Subject to technical changes; the figures are rounded and may vary depending on the equipment version.
MB-U universal version; MB-K conical version; V reinforced version; Container in round version on request.

PRESTO GmbH & Co. KG

Gewerbepark 4 | D-49196 Bad Laer
Fon +49 5424 2927-0 | Fax +49 5424 2927-90
kontakt@presto.eu | www.presto.eu

05/2024

more data-
scan hier

